

Product Data Sheet: ZXB 24 Volt Xenon Beacons



Dimensions

Description

When an eye-catching visual indicator is required, the ZXB range of xenon beacons will always meet the most stringent requirements.

The low profile design is complimented by a surface mount adaptor (SMA) which is supplied as standard with every beacon. The adaptor is a two part mounting mechanism that enables rapid installation either directly to the ceiling, wall or via a standard back box.

Each ZXB beacon incorporates a fresnel lens arrangement designed to give maximum light output. For the 5W beacons, this lens size heightened to give maximum light output.


The range have a specially reduced inrush current to ensure that the possibility of overloading sounder zones on activation is minimised.

Beacons are supplied as standard with red lens and black body; other lens colours available are blue, clear and amber.

Technical Information

Part No.	ZXB-1	ZXB-2	ZXB-5
Current @ 24Vdc:	42mA	84mA	210mA
Nominal Voltage:	24Vdc		
Flash Rate:	1Hz		
IP Rating:	IP65		
Temperature Range:	- 30°C to + 70°C		
Power Output:	1W	2W	5W
Weight:	135g	135g	172g

ZXB-1/2

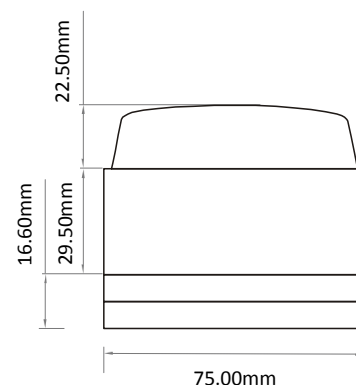

ZXB-5

