

The VXB EN54 Part 23 Approved beacon is part of the VXB family of products designed for use with conventional fire alarm systems

The VAD beacon has been designed for wall mounted with maximum all round visibility coupled with low power consumption

Approved at W-2.4-7 coverage range (Reduced room size coverage available via the DIL switch W-2.4-4, but does not comply with EN54-23)

Approved at 1Hz flash rate (0.5Hz flash rate available via the DIL switch, but does not comply with EN54-23)

The beacon functions are fully synchronised.

- Beacon (VAD) fully approved to EN54- 23
- Shallow base IP21C and deep base IP33C versions available
- Designed to work with conventional alarm circuits
- Unique twist and lock bayonet mounting system
- Removable cover on deep base for surface wiring
- Features base locking system as standard



TECHNICAL

Voltage range (Vdc)	18 - 30		
Temperature range (°C)	-20 to +70		
Flash rate	c.1Hz (Approved) (Option for 0.5Hz does not comply with EN54-23)		
Monitoring	Reverse polarity		
Protection rating (EN54 Approved)	IP21C (Shallow)	IP33C (Deep)	
Protection rating (BS EN 60529)	IP65C (Deep)		
Base part numbers	Shallow 116-085 Red 116-086 White	Deep 126-021 Red 126-022 White	
Boxed weight (kg)	0.22 (Shallow)	0.25 (Deep)	
Body colours available	Red or white (ABS fire retardant plastic)		
Lens colours available/flash colour	Red lens / Red flash		

PERFORMANCE

Max. current consumption @ 24Vdc (mA)	25
Max power consumption @ 24Vdc (mW)	600
Beacon coverage Range	W-2.4-7 (Approved) (Option for W-2.4-4, but does not comply with EN54-23)
Coverage volume:	118m ³
Light temporal pattern	Single pulse width of 35 - 100ms @ frequency of 1Hz (approved at 100ms)
Maintenance:	refer to local test and maintenance guidance

ORDERING INFORMATION

VXB-1EVAD EN54-23 W-2.4-7 Red body, shallow base, red flash	512-305
VXB-1EVAD EN54-23 W-2.4-7 Red body, deep base, red flash	512-306
VXB-1EVAD EN54-23 W-2.4-7 White body, shallow base, red flash	512-303
VXB-1EVAD EN54-23 W-2.4-7 White body, deep base, red flash	512-304


APPROVALS INFORMATION

EN54-23


 15
 0905-CPR-00473


innovationdesignmanufacture


DIMENSIONS

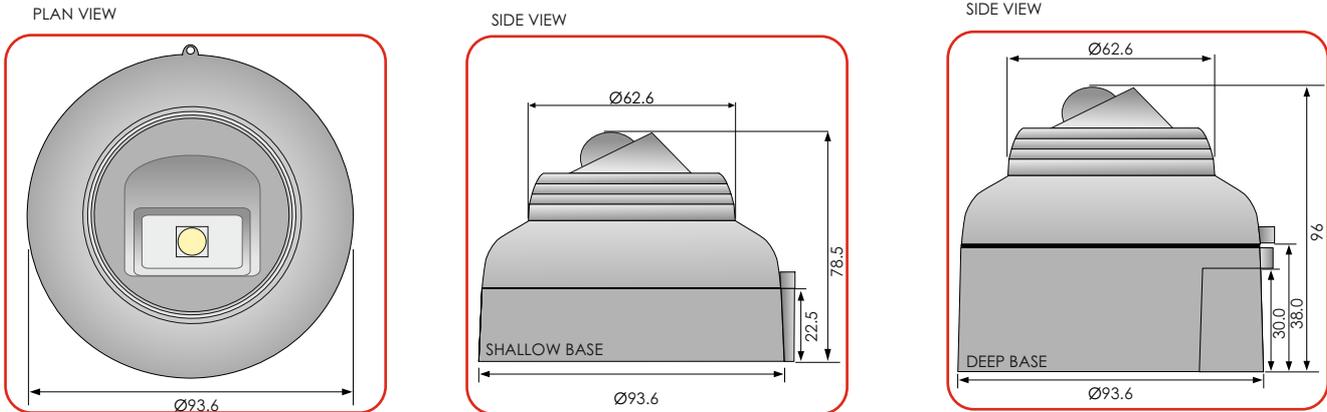

PRODUCT MOUNTING & CABLE ENTRY

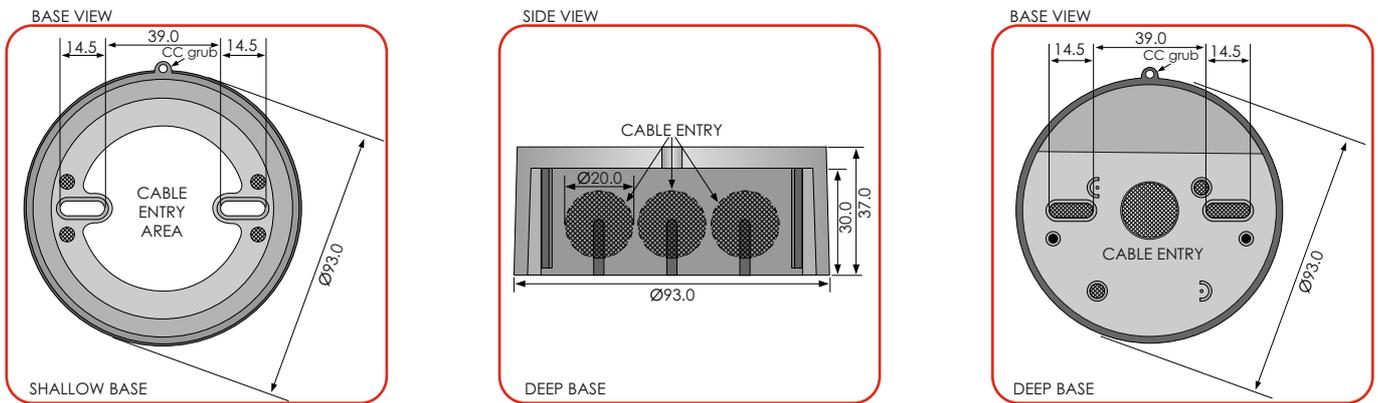

WIRING CONFIGURATION

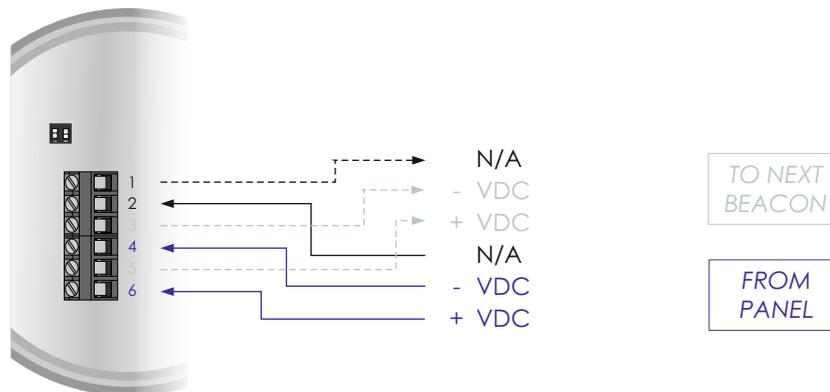

FLASH RATE & COVERAGE SELECTION

